

JUAL

OVERFLOW RING - EPDM



PRODUCT DESCRIPTION

JUAL Overflow Ring - EPDM

APPLICATIONS:

For installation in JUAL Outlets where an increased water level is required before drainage occurs. A typical application is emergency/overflow drainage.

The Overflow Ring can be adapted to a desired height between 25 and 75mm.

Note that small amounts of water may enter the roof outlet even though rainwater has not reached the predefined overflow level. If a completely watertight connection is required JUAL recommends applying an MS sealer on the adjoining surfaces.

MATERIALER:

EPDM Rubber– Shore 65.

At the bottom side there is a stainless steel ring protecting the roof membrane from migration with the EPDM rubber.



TÜVRheinland®
Precisely Right.

TÜV Rheinland-tested.

Certified in accordance with EN 1253.

APPROVALS

Overflow Ring - EPDM is approved according to EN1253, LGA-Certificate no. 57215060.


**JUAL**

TECHNICAL DATA SHEET

ARTICLE NUMBERS

TYPE	OVERFLOW RING DIM. (mm)					PCS / PACK	ARTICLE NUMBER
	D1 (fits for outlet Ø)	D2	D3	D4	T		
JUAL Overflow Ring - EPDM	50	34	64	70	5	5	1504101
	63	47	77	83	5	5	1504102
	75	59	89	95	5	5	1504103
	90	74	104	110	5	5	1504104
	110	94	120	130	5	5	1504105
	125	109	135	145	5	5	1504106
	145	129	155	165	5	5	1504107
	160	144	170	180	5	5	1504108

TECHNICAL INFORMATION

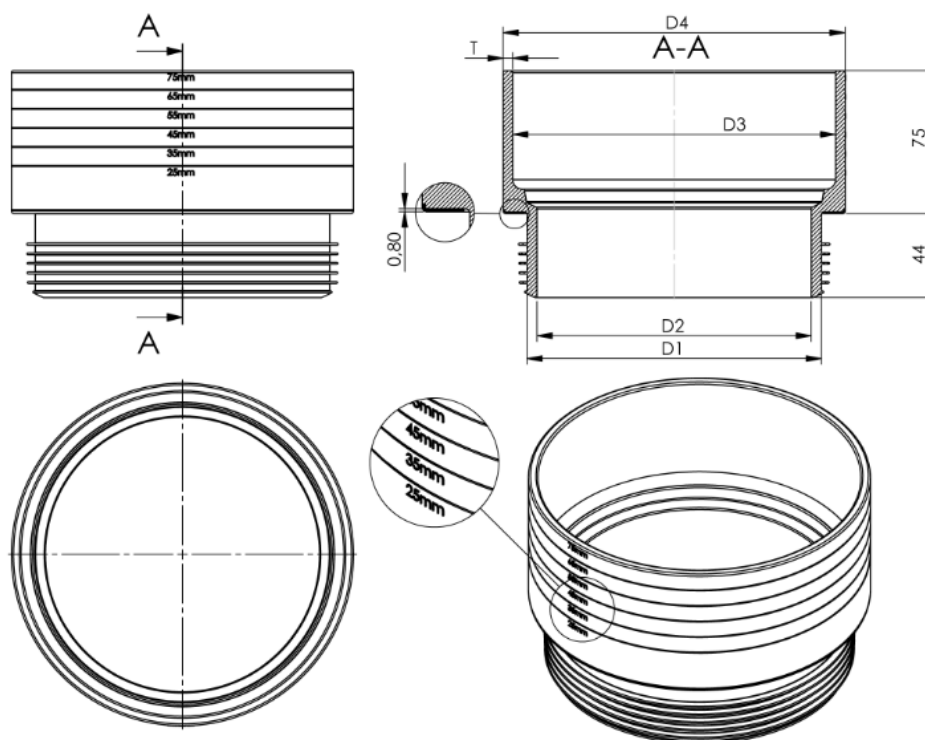

Please also see datasheet of JUAL Overflow Ring in stainless steel.